2022/10/19
09:18:15
KST

한국기계전기전자시험연구원
Korea Testing Certification Institute

Document No. : 99Z4-9V4O-EHXO

Test Report

Report No.	:	**KT2022-10570**
Company	:	Suprema ID Inc.
Representative	:	Park Bo Gun
Address	:	1207, 37, Sagimakgol-ro 62beon-gil, Jungwon-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
1. Product Name	:	RealPass-N
- Type and Model	:	DC 12 V [Model : RP-N, RealPass-N(MOJ), RealPass-NB, RealPass-N, RP-NB, RPN-B, RPN-F, RPN-J]
2. Use of Report	:	For submission (UL)
3. Date of Receipt	:	2022.09.30.
4. Date of test	:	2022.09.30. - 2022.10.19.
5. Location of test	:	☑ Permanent testing Lab ☐ On site testing
(Address :		22 Heungandaero-27-gil, Gunpo, Gyeonggi-do)
6. Testing Method	:	IEC 62471:2006 (First Edition) & EN 62471:2008
7. Test Results	:	Refer to the attachment

Test by : Sung-Hyun Kim 김성현(sign) **Approved by :** Junrae Cho 조준래(sign)

한국기계전기전자시험연구원

1. This result of the above report are related to KS Q ISO/IEC 17025 and KOLAS recognition and the result of testing with samples and sample names suggested by the client does not guarantee the quality of entire products
2. This report should not be used for advertising, lawsuit, etc. without any official permission of KTC. It is only used for the purpose of the quality test.
3. The authenticity of the report is available on the website (www.ktc.re.kr).

2022. 10. 19.

Korea Testing Certification institute

Accredited by KOLAS, Republic of KOREA

www.ktc.re.kr [15809] 22 Heungandaero-27-gil, Gunpo, Gyeonggi-do
TEL : +82-1899-7654 , FAX : +82-31-455-7307

The above test report is the accredited test items by korea Laboratory Accreditation Scheme, which signed the ILAC-MRA

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

TEST REPORT IEC 62471 Photobiological safety of lamps and lamp systems	
Report Reference No. ..... :	KT2022-10570
Tested by (printed name and signature) ..... :	Sung-Hyun Kim 김성현
Approved by (printed name and signature) ..... :	Junrae Cho 조준래
Date of issue ..... :	2022. 10. 19.
Total number of pages ..... :	19 Pages
Name of Testing Laboratory preparing the Report ..... :	KTC(Korea Testing Certification Institute)
Address ..... :	22, Heungandaero 27-gil, Gunpo-si, Gyeonggi-do, Republic of Korea
Applicant's name ..... :	Suprema ID Inc.
Address ..... :	1207, 37, Sagimakgol-ro 62beon-gil, Jungwon-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
Test specification:	
Standard ..... :	IEC 62471:2006 (First Edition) & EN 62471:2008
Test procedure ..... :	N/A
Non-standard test method ..... :	N/A
Test item description ..... :	RealPass-N
Trade Mark ..... :	n/a
Manufacturer ..... :	Same as applicant
Model/Type reference ..... :	RP-N, RealPass-N(MOJ), RealPass-NB, RealPass-N, RP-NB, RPN-B, RPN-F, RPN-J
Ratings ..... :	DC 12 V

한국기계전기전자시험연구원

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

Test item particulars.....:	
Tested lamp.....:	☒ continuous wave lamps ☐ pulsed lamps
Used measurement instrument.....:	IDR-300
Temperature by measurement.....:	25 °C
Information for safety use.....:	Not required
Possible test case verdicts:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement .....:	P (Pass)
- test object does not meet the requirement .....:	F (Fail)
Testing.....:	
Date of receipt of test item.....:	2022. 09. 30.
Date (s) of performance of tests.....:	2022. 09. 30. ~ 2022. 10. 19.

General remarks:

"(See Enclosure #)" refers to additional information appended to the report.
"(See appended table)" refers to a table appended to the report.

Throughout this report a ☒ comma / ☐ point is used as the decimal separator.

Summary of testing:

Measurement results : See **table 6.1 (Page 15)**

Summary of result (IEC 62471)

Hazard	Risk Group
Actinic UV	**Exempt**
Near UV	**Exempt**
Blue Light	**Exempt**
Retinal Thermal	**Exempt**
Infrared	**Exempt**
Thermal Skin	**Pass**

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

General product information and other remarks:

Product Description :
- This product is a document reader with white, IR, and UVA light sources.

Model Difference :
- Models RP-N, RealPass-N(MOJ), RealPass-NB, RealPass-N, RP-NB, RPN-B, RPN-F and RPN-J have different names, but the product is exactly the same.

Test condition :
- The test was performed with end product.
- Irradiance was measured in the direction in which the maximum value was obtained.
- Tested with all light sources on.

KTC
한국기계전기전자시험연구원

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Clause	Requirement + Test	Result - Remark	Verdict
4	EXPOSURE LIMITS		-
4.1	General		-
	The exposure limits in this standard is not less than 0,01 ms and not more than any 8-hour period and should be used as guides in the control of exposure		P
	Detailed spectral data of a light source are generally required only if the luminance of the source exceeds 10^4 cd·m^{-2}	see clause 4.3	N/A
4.3	Hazard exposure limits		-
4.3.1	Actinic UV hazard exposure limit for the skin and eye		P
	The exposure limit for effective radiant exposure is 30 J·m^{-2} within any 8-hour period		P
	To protect against injury of the eye or skin from ultraviolet radiation exposure produced by a broadband source, the effective integrated spectral irradiance , E_S, of the light source shall not exceed the levels defined by:		P
	$E_s \cdot t = \sum_{200}^{400} \sum_{t} E_\lambda(\lambda,t) \cdot S_{UV}(\lambda) \cdot \Delta t \cdot \Delta\lambda \le 30$ J·m^{-2}		P
	The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye or skin shall be computed by:		P
	$t_{max} = \frac{30}{E_s}$ s	>30 000 s	P
4.3.2	Near-UV hazard exposure limit for eye		-
	For the spectral region 315 nm to 400 nm (UV-A) the total radiant exposure to the eye shall not exceed 10000 J·m^{-2} for exposure times less than 1000 s. For exposure times greater than 1000 s (approximately 16 minutes) the UV-A irradiance for the unprotected eye, E_{UVA}, shall not exceed 10 W·m^{-2}.		P
	The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye for time less than 1000 s, shall be computed by:		P
	$t_{max} \le \frac{10\,000}{E_{UVA}}$ s	>30 000 s	P
4.3.3	Retinal blue light hazard exposure limit		-
	To protect against retinal photochemical injury from chronic blue-light exposure, the integrated spectral radiance of the light source weighted against the blue-light hazard function, B(λ), i.e., the blue-light weighted		P

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Clause	Requirement + Test	Result - Remark	Verdict
	radiance , L_B, shall not exceed the levels defined by:		
	$L_B \cdot t = \sum_{300}^{700} \sum_{t} L_\lambda(\lambda,t) \cdot B(\lambda) \cdot \Delta t \cdot \Delta\lambda \le 10^6$ $J \cdot m^{-2} \cdot sr^{-1}$	for $t \le 10^4$ s $t_{max} = \frac{10^6}{L_B}$	P
	$L_B = \sum_{300}^{700} L_\lambda \cdot B(\lambda) \cdot \Delta\lambda \le 100$ $W \cdot m^{-2} \cdot sr^{-1}$	for $t > 10^4$ s	P
4.3.4	Retinal blue light hazard exposure limit - small source		-
	Thus the spectral irradiance at the eye E_λ, weighted against the blue-light hazard function $B(\lambda)$ shall not exceed the levels defined by:	see table 4.2	N/A
	$E_B \cdot t = \sum_{300}^{700} \sum_{t} E_\lambda(\lambda,t) \cdot B(\lambda) \cdot \Delta t \cdot \Delta\lambda \le 100$ $J \cdot m^{-2}$	for $t \le 100$ s	N/A
	$E_B = \sum_{300}^{700} E_\lambda \cdot B(\lambda) \cdot \Delta\lambda \le 1$ $W \cdot m^{-2}$	for $t > 100$ s	N/A
4.3.5	Retinal thermal hazard exposure limit		-
	To protect against retinal thermal injury, the integrated spectral radiance of the light source, L_λ, weighted by the burn hazard weighting function $R(\lambda)$ (from Figure 4.2 and Table 4.2), i.e., the burn hazard weighted radiance, shall not exceed the levels defined by:	see table 4.2	P
	$L_R = \sum_{380}^{1400} L_\lambda \cdot R(\lambda) \cdot \Delta\lambda \le \frac{50\,000}{\alpha \cdot t^{0,25}}$ $W \cdot m^{-2} \cdot sr^{-1}$	(10 µs ≤ t ≤ 10 s)	P
4.3.6	Retinal thermal hazard exposure limit - weak visual stimulus		-
	For an infrared heat lamp or any near-infrared source where a weak visual stimulus is inadequate to activate the aversion response, the near infrared (780 nm to 1400 nm) radiance, L_{IR}, as viewed by the eye for exposure times greater than 10 s shall be limited to:		N/A
	$L_{IR} = \sum_{780}^{1400} L_\lambda \cdot R(\lambda) \cdot \Delta\lambda \le \frac{6\,000}{\alpha}$ $W \cdot m^{-2} \cdot sr^{-1}$	$t > 10$ s	N/A
4.3.7	Infrared radiation hazard exposure limits for the eye		-
	The avoid thermal injury of the cornea and possible delayed effects upon the lens of the eye (cataractogenesis), ocular exposure to infrared radiation, E_{IR}, over the wavelength range 780 nm to 3000 nm, for times less than 1000 s, shall not exceed:		P
	$E_{IR} = \sum_{780}^{3\,000} E_\lambda \cdot \Delta\lambda \le 18\,000 \cdot t^{-0,75}$ $W \cdot m^{-2}$	$t \le 1000$ s	P
	For times greater than 1000 s the limit becomes:		-
	$E_{IR} = \sum_{780}^{3\,000} E_\lambda \cdot \Delta\lambda \le 100$ $W \cdot m^{-2}$	$t > 1000$ s	P

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Clause	Requirement + Test	Result - Remark	Verdict
4.3.8	Thermal hazard exposure limit for the skin		-
	Visible and infrared radiant exposure (380 nm to 3000 nm) of the skin shall be limited to:		P
	$E_H \cdot t = \sum_{380}^{3\,000} \sum_{t} E_\lambda(\lambda,t) \cdot \Delta t \cdot \Delta\lambda \le 20\,000 \cdot t^{0,25}$ J · m^{-2}		P
5	MEASUREMENT OF LAMPS AND LAMP SYSTEMS		-
5.1	Measurement conditions		-
	Measurement conditions shall be reported as part of the evaluation against the exposure limits and the assignment of risk classification.		P
5.1.1	Lamp ageing (seasoning)		-
	Seasoning of lamps shall be done as stated in the appropriate IEC lamp standard.	No appropriate IEC lamp standard.	P
5.1.2	Test environment		-
	For specific test conditions, see the appropriate IEC lamp standard or in absence of such standards, the appropriate national standards or manufacturer's recommendations.		P
5.1.3	Extraneous radiation		-
	Careful checks should be made to ensure that extraneous sources of radiation and reflections do not add significantly to the measurement results.		P
5.1.4	Lamp operation		-
	Operation of the test lamp shall be provided in accordance with:		-
	– the appropriate IEC lamp standard, or	No appropriate IEC standard.	N/A
	– the manufacturer' s recommendation		P
5.1.5	Lamp system operation		-
	The power source for operation of the test lamp shall be provided in accordance with:		-
	– the appropriate IEC standard, or	No appropriate IEC standard.	N/A
	– the manufacturer' s recommendation		P
5.2	Measurement procedure		-
5.2.1	Irradiance measurements		P
	Minimum aperture diameter 7mm.		N/A
	Maximum aperture diameter 50 mm.		N/A
	The measurement shall be made in that position of the beam giving the maximum reading.		P
	The measurement instrument is adequate calibrated.		P
5.2.2	Radiance measurements		-
5.2.2.1	Standard method		-

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Clause	Requirement + Test	Result - Remark	Verdict
	The measurements made with an optical system.		P
	The instrument shall be calibrated to read in absolute radiant power per unit receiving area and per unit solid angle to acceptance averaged over the field of view of the instrument.		P
5.2.2.2	Alternative method		-
	Alternatively to an imaging radiance set-up, an irradiance measurement set-up with a circular field stop placed at the source can be used to perform radiance measurements.		P
5.2.3	Measurement of source size		-
	The determination of α, the angle subtended by a source, requires the determination of the 50% emission points of the source.		P
5.2.4	Pulse width measurement for pulsed sources	Continuous type	-
	The determination of Δt, the nominal pulse duration of a source, requires the determination of the time during which the emission is > 50% of its peak value.		N/A
5.3	Analysis methods		-
5.3.1	Weighting curve interpolations		-
	To standardize interpolated values, use linear interpolation on the log of given values to obtain intermediate points at the wavelength intervals desired.	see table 4.1	P
5.3.2	Calculations		-
	The calculation of source hazard values shall be performed by weighting the spectral scan by the appropriate function and calculating the total weighted energy.		P
5.3.3	Measurement uncertainty		-
	The quality of all measurement results must be quantified by an analysis of the uncertainty.	see Annex C in the norm	P
6	Lamp Classification		-
	For the purposes of this standard it was decided that the values shall be reported as follows:	see table 6.1	-
	– for lamps intended for general lighting service, the hazard values shall be reported as either irradiance or radiance values at a distance which produces an illuminance of 500 lux, but not at a distance less than 200 mm		N/A
	– for all other light sources, including pulsed lamp sources, the hazard values shall be reported at a distance of 200 mm	Non-GLS	P
6.1	Continuous wave lamps		-

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

Clause	Requirement + Test	Result - Remark	Verdict
6.1.1	Except Group		-
	In the except group are lamps, which does not pose any photobiological hazard. The requirement is met by any lamp that does not pose:		-
	– an actinic ultraviolet hazard (ES) within 8-hours exposure (30000 s), nor		P
	– a near-UV hazard (EUVA) within 1000 s, (about 16 min), nor		P
	– a retinal blue-light hazard (LB) within 10000 s (about 2,8 h), nor		P
	– a retinal thermal hazard (LR) within 10 s, nor	11 mrad FOV	P
	– an infrared radiation hazard for the eye (EIR) within 1000 s		P
6.1.2	Risk Group 1 (Low-Risk)		-
	In this group are lamps, which exceeds the limits for the except group but that does not pose:	All risk are in the except group	-
	– an actinic ultraviolet hazard (ES) within 10000 s, nor		N/A
	– a near ultraviolet hazard (EUVA) within 300 s, nor		N/A
	– a retinal blue-light hazard (LB) within 100 s, nor		N/A
	– a retinal thermal hazard (LR) within 10 s, nor		N/A
	– an infrared radiation hazard for the eye (EIR) within 100 s		N/A
	Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (LIR), within 100 s are in Risk Group 1.		N/A
6.1.3	Risk Group 2 (Moderate-Risk)		-
	This requirement is met by any lamp that exceeds the limits for Risk Group 1, but that does not pose:	All risk are in the except group	-
	– an actinic ultraviolet hazard (ES) within 1000 s exposure, nor		N/A
	– a near ultraviolet hazard (EUVA) within 100 s, nor		N/A
	– a retinal blue-light hazard (LB) within 0,25 s (aversion response), nor		N/A
	– a retinal thermal hazard (LR) within 0,25 s (aversion response), nor		N/A
	– an infrared radiation hazard for the eye (EIR) within 10 s		N/A
	Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (LIR), within 10 s are in Risk Group 2.		N/A
6.1.4	Risk Group 3 (High-Risk)		-

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Clause	Requirement + Test	Result - Remark	Verdict
	Lamps which exceed the limits for Risk Group 2 are in Group 3.	All risk are in the except group	N/A
6.2	Pulsed lamps		-
	Pulse lamp criteria shall apply to a single pulse and to any group of pulses within 0,25 s.	Continuous type	N/A
	A pulsed lamp shall be evaluated at the highest nominal energy loading as specified by the manufacturer.		N/A
	The risk group determination of the lamp being tested shall be made as follows:		N/A
	– a lamp that exceeds the exposure limit shall be classified as belonging to Risk Group 3 (High-Risk)		N/A
	– for single pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance does is below the EL shall be classified as belonging to the Exempt Group		N/A
	– for repetitively pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance dose is below the EL, shall be evaluated using the continuous wave risk criteria discussed in clause 6.1, using time averaged values of the pulsed emission		N/A

한국기계전기전자시험연구원

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

Clause	Requirement + Test	Result - Remark	Verdict

Table 4.1	Spectral weighting function for assessing ultraviolet hazards for skin and eye	-

Wavelength[1] λ, nm	UV hazard function $S_{UV}(\lambda)$	Wavelength λ, nm	UV hazard function $S_{UV}(\lambda)$
200	0,030	313*	0,006
205	0,051	315	0,003
210	0,075	316	0,0024
215	0,095	317	0,0020
220	0,120	318	0,0016
225	0,150	319	0,0012
230	0,190	320	0,0010
235	0,240	322	0,00067
240	0,300	323	0,00054
245	0,360	325	0,00050
250	0,430	328	0,00044
254*	0,500	330	0,00041
255	0,520	333*	0,00037
260	0,650	335	0,00034
265	0,810	340	0,00028
270	1,000	345	0,00024
275	0,960	350	0,00020
280*	0,880	355	0,00016
285	0,770	360	0,00013
290	0,640	365*	0,00011
295	0,540	370	0,000093
297*	0,460	375	0,000077
300	0,300	380	0,000064
303*	0,120	385	0,000053
305	0,060	390	0,000044
308	0,026	395	0,000036
310	0,015	400	0,000030

[1] Wavelengths chosen are representative: other values should be obtained by logarithmic interpolation at intermediate wavelengths.

* Emission lines of a mercury discharge spectrum.

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Clause	Requirement + Test	Result - Remark	Verdict
Table 4.2	Spectral weighting functions for assessing retinal hazards from broadband optical sources		-

Wavelength nm	Blue-light hazard function B (λ)	Burn hazard function R (λ)
300	0,01	
305	0,01	
310	0,01	
315	0,01	
320	0,01	
325	0,01	
330	0,01	
335	0,01	
340	0,01	
345	0,01	
350	0,01	
355	0,01	
360	0,01	
365	0,01	
370	0,01	
375	0,01	
380	0,01	0,1
385	0,013	0,13
390	0,025	0,25
395	0,05	0,5
400	0,10	1,0
405	0,20	2,0
410	0,40	4,0
415	0,80	8,0
420	0,90	9,0
425	0,95	9,5
430	0,98	9,8
435	1,00	10,0
440	1,00	10,0
445	0,97	9,7
450	0,94	9,4
455	0,90	9,0
460	0,80	8,0
465	0,70	7,0
470	0,62	6,2
475	0,55	5,5

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

Clause	Requirement + Test	Result - Remark	Verdict
Table 4.2	Spectral weighting functions for assessing retinal hazards from broadband optical sources		-
480	0,45	4,5	
485	0,40	4,0	
490	0,22	2,2	
495	0,16	1,6	
500-600	$10^{[(450-\lambda)/50]}$	1,0	
600-700	0,001	1,0	
700-1050		$10^{[(700-\lambda)/500]}$	
1050-1150		0,2	
1150-1200		$0,2 \cdot 10^{0,02(1150-\lambda)}$	
1200-1400		0,02	

KTC
한국기계전기전자시험연구원

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

Clause	Requirement + Test	Result - Remark	Verdict

Table 5.4	Summary of the ELs for the surface of the skin or cornea (irradiance based values)	-

Hazard Name	Relevant equation	Wavelength range nm	Exposure duration sec	Limiting aperture rad (deg)	EL in terms of constant irradiance $W \cdot m^{-2}$
Actinic UV skin & eye	$E_S = \Sigma E_\lambda \cdot S(\lambda) \cdot \Delta\lambda$	200 - 400	< 30000	1,4 (80)	30/t
Eye UV-A	$E_{UVA} = \Sigma E_\lambda \cdot \Delta\lambda$	315 - 400	≤1000 >1000	1,4 (80)	10000/t 10
Blue-light small source	$E_B = \Sigma E_\lambda \cdot B(\lambda) \cdot \Delta\lambda$	300 - 700	≤100 >100	< 0,011	100/t 1,0
Eye IR	$E_{IR} = \Sigma E_\lambda \cdot \Delta\lambda$	780 - 3000	≤1000 >1000	1,4 (80)	$18000/t^{0,75}$ 100
Skin thermal	$E_H = \Sigma E_\lambda \cdot \Delta\lambda$	380 - 3000	< 10	2π sr	$20000/t^{0,75}$

Table 5.5	Summary of the ELs for the retina (radiance based values)	-

Hazard Name	Relevant equation	Wavelength range nm	Exposure duration sec	Field of view radians	EL in terms of constant radiance $W \cdot m^{-2} \cdot sr^{-1}$)
Blue light	$L_B = \Sigma L_\lambda \cdot B(\lambda) \cdot \Delta\lambda$	300 - 700	0,25 - 10 10-100 100-10000 ≥ 10000	$0,011 \cdot \sqrt{(t/10)}$ 0,011 $0,0011 \cdot \sqrt{t}$ 0,1	$10^6/t$ $10^6/t$ $10^6/t$ 100
Retinal thermal	$L_R = \Sigma L_\lambda \cdot R(\lambda) \cdot \Delta\lambda$	380 - 1400	< 0,25 0,25 - 10	0,0017 $0,011 \cdot \sqrt{(t/10)}$	$50000/(\alpha \cdot t^{0,25})$ $50000/(\alpha \cdot t^{0,25})$
Retinal thermal (weak visual stimulus)	$L_{IR} = \Sigma L_\lambda \cdot R(\lambda) \cdot \Delta\lambda$	780 - 1400	> 10	0,011	6000/α

한국기계전기전자시험연구원

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1	Emission limits for risk groups of continuous wave lamps								P
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	7,92E-06	0,003	n/a	0,03	n/a
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,016	33	n/a	100	n/a
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	18,5591	10000	n/a	4000000	n/a
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	n/a	1,0	n/a	400	n/a
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/α= 280000	227,8886	28000/α	n/a	71000/α	n/a
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	6000/α	n/a	6000/α	n/a	6000/α	n/a
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,1856	570	n/a	3200	n/a

* Small source defined as one with α < 0,011 radian. Averaging field of view at 10000 s is 0,1 radian.
** Involves evaluation of non-GLS source

한국기계전기전자시험연구원

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

Test Result

Report No. : KT2022-10570

EN 62471			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62471 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES PHOTOBIOLOGICAL SAFETY OF LAMPS AND LAMPS SYSTEMS	
Differences according to .....:	EN 62471:2008
Attachment Form No. .....:	EU_GD_IEC62471A
Attachment Originator .....:	IMQ S.p.A.
Master Attachment .....:	2009-07
Copyright © 2009 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.	

	CENELEC COMMON MODIFICATIONS (EN)		-
4	EXPOSURE LIMITS		-
	Contents of the whole Clause 4 of IEC 62471:2006 moved into a new informative Annex ZB		—
	Clause 4 replaced by the following:		-
	Limits of the Artificial Optical Radiation Directive (2006/25/EC) have been applied instead of those fixed in IEC 62471:2006	See appended Table 6.1	P
4.1	General		-
	First paragraph deleted		—

한국기계전기전자시험연구원

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

EN 62471			
Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)									P
Risk	Action spectrum	Symbol	Units	Emission Measurement						
				Exempt		Low risk		Mod risk		
				Limit	Result	Limit	Result	Limit	Result	
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	7,92E-06	-	-	-	-	
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,016	-	-	-	-	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	18,5591	10000	n/a	4000000	n/a	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	n/a	1,0	n/a	400	n/a	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/α= 280000	227,8886	28000/α	n/a	71000/α	n/a	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017≤ α ≤ 0,011	n/a					
				6000/α 0,011≤ α ≤ 0,1	n/a					
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,1856	570	n/a	3200	n/a	

* Small source defined as one with α < 0,011 radian. Averaging field of view at 10000 s is 0,1 radian.
** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2
The applicable aperture diameters: see 4.2.1
The limitations for the angular subtenses: see 4.2.2
The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.


Test Result


Report No. : KT2022-10570

Remarks

1. Test Environment :
   (1) Temperature : (25 ± 5) ℃
   (2) Relative Humidity : (65 ± 20) % R.H.

2. Spectral Data

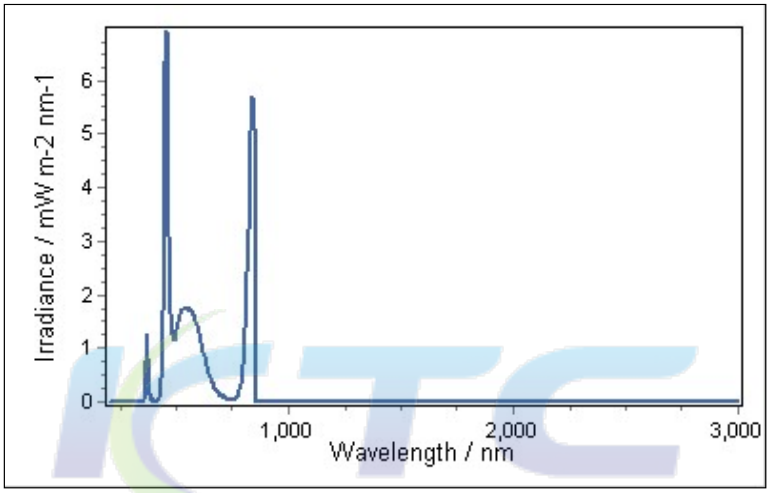

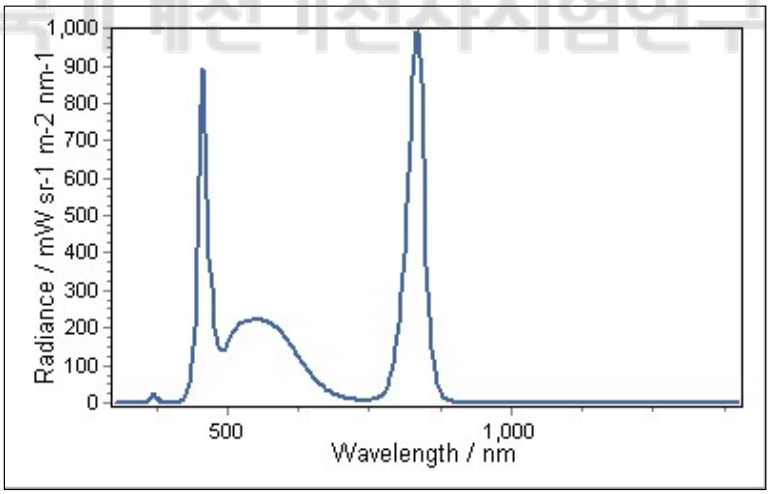

한국기계전기전자시험연구원

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.

3. Sample photo





--- END OF REPORT ---

본 문서는 전자문서용으로 인쇄본은 원본성적서로 인정할 수 없습니다.
전자문서의 진위 확인은 연구원 웹사이트(cs.ktc.re.kr)를 통하여 확인할 수 있습니다.